



### Specification:

Shall be a Garland Induction Unit, Model GIU 2.5 with total kW rating of 2.5kW, Unit to be constructed of all stainless steel with ceramic glass top. Unit to have adjustable control, 60 second auto shut-off safety feature, and overheat control sensors to prevent damage to unit if pan is run dry. Unit to come in \_\_\_\_\_ power with integral cord and plug supplied. (60 cycle units only)



Conforms to UL-197 & NSF-4  
 Certified to CAN/CSA C22.2 NO. 109  
 VDE EN60335-2-38

### Standard Features:

- Compact table top design with stainless steel body and high impact ceramic glass top
- Induction technology transfers heat to the pan, and does not transfer heat to the surrounding air, allowing for cool operation
- Sloped, easy to see front panel with adjustable control for easy operation
- Instant energy transmission to the pan
- “Flat Design”, compact high performance electronics allow for low unit heights
- “Surface Mounted Device,” (SMD), technology allows for the most efficient transfer of induction energy from the coil to the pan with minimal transmission loss
- “60 Second Auto Shut-Off” automatically turns off all power to the unit if there has been no pan on for more than 60 seconds. This prevents the accidental heating up of pans or utensils set on the cook surface
- Thermostatically controlled overheat sensor shuts the unit off to prevent damage from pans cooking dry
- Electronic output limitation continually monitors the energy transfer to the pan, as different quality induction pans absorb energy at different rates. This helps ensure the most efficient energy transfer possible.
- Integral cooling fan keeps electronics cool and discharges from the rear at the bottom of the unit
- 6' (1829mm) cord and plug supplied (60 cycle units only)

### How Induction Works:

Although induction seems magical in how it works, there is a scientific explanation.

1. An alternating current in an induction coil produces an alternating magnetic field
2. This magnetic field is instantly transferred and concentrated to the cooking vessel
3. This concentrated magnetic energy in the cooking vessel causes it to heat up and start cooking
4. When the vessel is removed from the heat source, the induction unit automatically shuts off

**Note:** Induction cooking requires magnetic pots and pans to work effectively.

**Garland Commercial Industries, Inc.**  
 185 East South Street  
 Freeland, Pennsylvania 18224  
 Phone: (570) 636-1000  
 Fax: (570) 636-3903

**Garland Commercial Ranges Ltd**  
 1177 Kamato Road, Mississauga, Ontario  
 L4W 1X4 CANADA  
 Phone: 905-624-0260  
 Fax: 905-624-5669


**Enodis UK LTD**  
 Swallowfield Way, Hayes, Middlesex  
 UB3 1DQ ENGLAND  
 Telephone: 081-561-0433  
 Fax: 081-848-0041




Item #: \_\_\_\_\_

Model: GIU-2.5

Product Name: Induction Unit

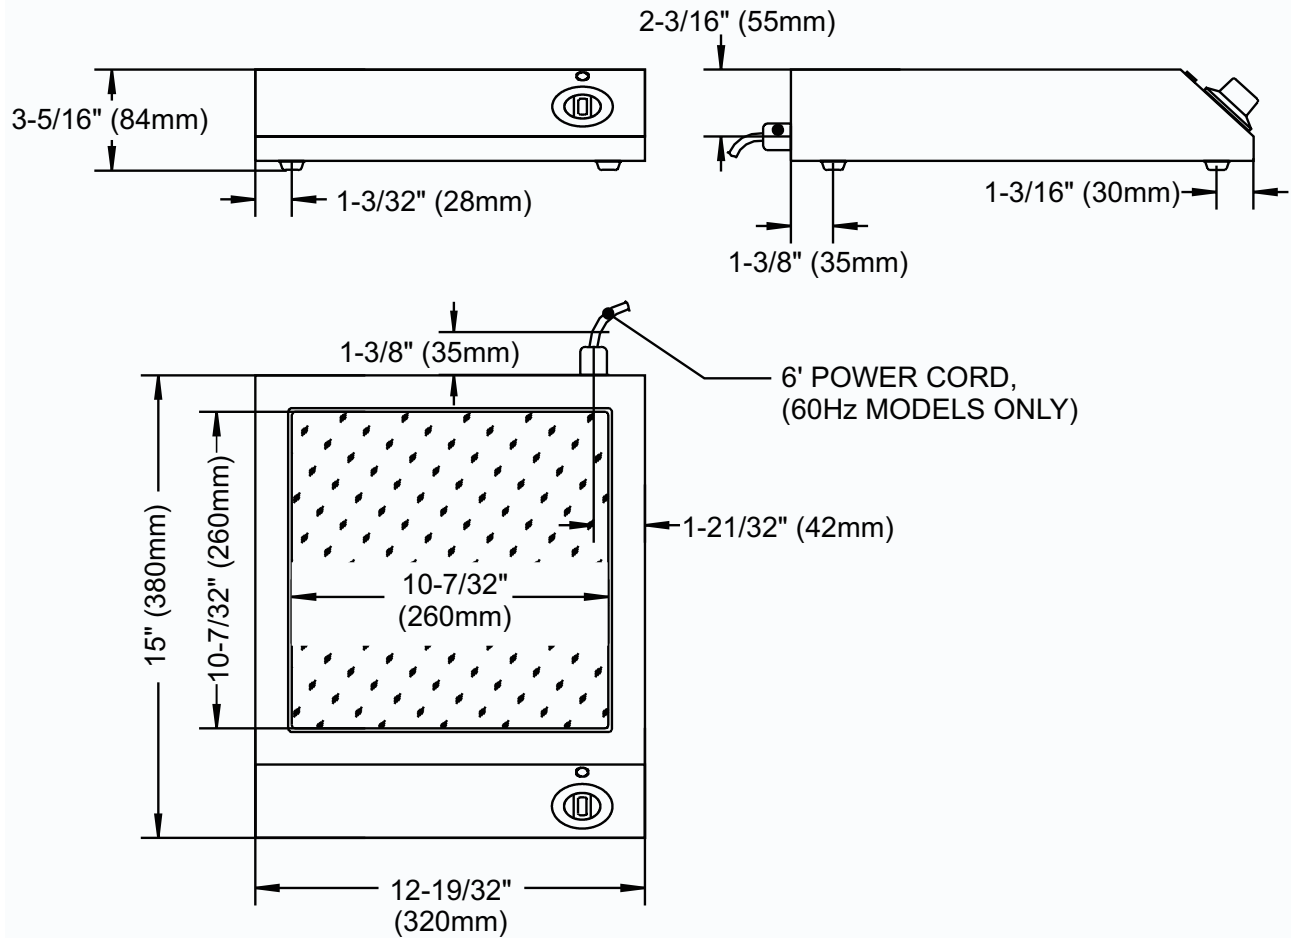

**PLUG CONFIGURATIONS:**

Model	Electrical Characteristics	Plug
GUI-2.5	208V/60Hz/1Ø 240V/60Hz/1Ø	 NEMA 6-15P

**Electrical Loading:**

Model	Watts	208/60/1	208/60/3	240/60/1	230/50/1	400/50/3	440/60/3
GUI-2.5	2500	12 amp	N/A	9 amp	10 amp	N/A	N/A