



Item #: \_\_\_\_\_

Models: SERC, SER-680

Product Name: S680 Sentry Series  
Electric Salamander Broiler



Model SEUR-686

**Standard Features:**

- Stainless steel exterior
- Six metal sheath elements, 3 over each half of broiler rack, 1.16 kW each, (3.5 kW per side, 7.0 kW total)
- Elements are controlled by two 3-heat switch controls, one for each half of the broiler rack
- Fixed position broiling rack with flat or easy view tilt position, roll-in, roll-out rack
- Large capacity removable grease pan
- Heat resistant, cool touch handle with easy grip shape
- 4" ( 102mm) sanitary legs for model SERC or SEURC
- One year limited warranty on parts & labor (USA & Canada only)

**Specification:**

Electric salamander broiler with dual controlled Solar Ray heating elements. All Stainless steel construction, 34" (864mm) wide with fixed position broiling rack. Available wall mounted or counter mounted (Model SERC). Also available range mounted, (models SER-686, and SER-684 for mounting on range models S686 and S684, respectively).

**CE Marked Model SUERC or SUER-680 Standard Features**

- All standard features as above. Only model number designation changes

**Optional Features:**

- Stainless steel wall-mount brackets for model SERC or SEURC, please specify when ordering
- Stainless steel main back



Note: Only models with prefix "SU" carry the CE Mark

Garland Commercial Industries, Inc.  
185 East South Street  
Freeland, Pennsylvania 18224  
Phone: (570) 636-1000  
Fax: (570) 636-3903

Garland Commercial Ranges Ltd  
1177 Kamato Road, Mississauga, Ontario  
L4W 1X4 CANADA  
Phone: 905-624-0260  
Fax: 905-624-5669

Enodis UK LTD  
Swallowfield Way, Hayes, Middlesex  
UB3 1DQ ENGLAND  
Telephone: 081-561-0433  
Fax: 081-848-0041

GARLAND® ELECTRIC 5680 Sentry Series Electric Salamander Broiler Models: SERC, SER-680



Item #: \_\_\_\_\_  
 Models: SERC, SER-680  
 Product Name: S680 Sentry Series  
 Electric Salamander Broiler

Model	Total Kw Load	208V/ 1Ph	TOTAL AMPS				
			208V/3 Ph	240V/1Ph	240V/3 Ph	400 V/3N	415V/3N
SERC, SER-680 wired independently	7	34	29	29	25	15	15


**Installation Notes:**

Clearances from combustible surfaces should be minimum 7" (178mm) from sides, 2" (51mm) from back

Note: Salamander can not be installed wired from the range base on a S/SS/SU684 in 208/1/60.  
 Salamander must have a separate circuit.

**KW Ratings**

Total kW loading is 7.0 kW

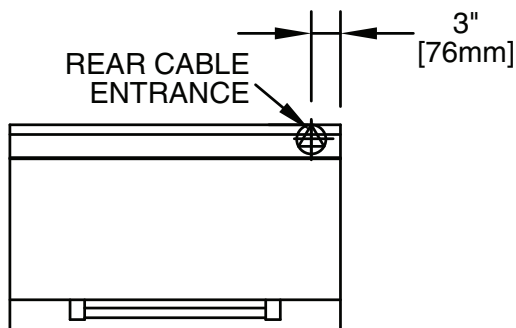

Model	Weight	
	Pounds	KG
S/SUERC	164	76
S/SUER-680	190	86

