




Model XG36

**Specification:**

Two sided cooking device with gas-fired griddle and three independently controlled 11.5" (286mm) wide electric top heaters. Each twelve inches of lower griddle plate to have 33,000 BTU/hr of heat input natural or propane gas. Burner to be rectangular shaped 16 GA stainless steel with laser cut port pattern. Griddle plate to be 3/4" (19mm) thick Carbon steel, machine ground and highly polished. Automatic lighting, temperature, time & gap control monitored via custom programable controllers, one per foot of griddle. Gas pressure regulator and manual shut-off valve to be provided as standard. Electric top heaters to be provided with replaceable quick release Teflon sheets. Top heaters to have gapping adjustment in 0.010" increments. Available with three (XG36), two (XG36-2L/R), one (XG36-1L/C/R) or zero (XG36-F) top platen. Grill available in 208V/220V/240V three phase and 380V/400V/415V three phase for export.

**Standard Features:**

- Stainless steel front, top & sides
- 33,000 BTU/hr. heat input for each twelve-inch section of griddle
- 3/4" NPT bottom gas connection
- Built in pressure regulator (one per twelve inch section of griddle) and gas shut-off valve
- 3/4" (19mm) thick, Carbon steel griddle plate, machine ground, highly polished
- Die cast aluminum electric top heating elements rated 208V/220V/240V three phase, domestic
- "CE" approved models have suffix "CE" within the model structure, i.e. XG36CE, these units are rated 380V/400V/415V three phase
- Automatic lifting and lowering of top heaters
- Towel bar with bun pan lip
- Stainless steel dual side grease collectors
- Swivel casters complete with front brakes (quantity of 4)
- Separate programmable controller for each twelve-inch section
- Multi-colored LED indicator lights to identify operational mode
- One year limited parts and labor (USA & Canada)

**Optional Features:**

- Stainless steel main back
- 6" (152mm) adjustable stainless steel legs
- Quick disconnect gas hose 3' (914mm) length
- Cutting board

NOTE: Grills supplied with casters must be installed with an approved restraining device.



**Garland Commercial Industries, Inc.**  
 185 East South Street  
 Freeland, Pennsylvania 18224  
 Phone: (570) 636-1000  
 Fax: (570) 636-3903

**Garland Commercial Ranges Ltd**  
 1177 Kamato Road, Mississauga, Ontario  
 L4W 1X4 CANADA  
 Phone: 905-624-0260  
 Fax: 905-624-5669

**Enodis UK LTD**  
 Swallowfield Way, Hayes, Middlesex  
 UB3 1DQ ENGLAND  
 Telephone: 081-561-0433  
 Fax: 081-848-0041




**GARLAND®**

Item #: \_\_\_\_\_

Model: XG36, XG36CE

Product Name: Master Series Gas Xpress Grill

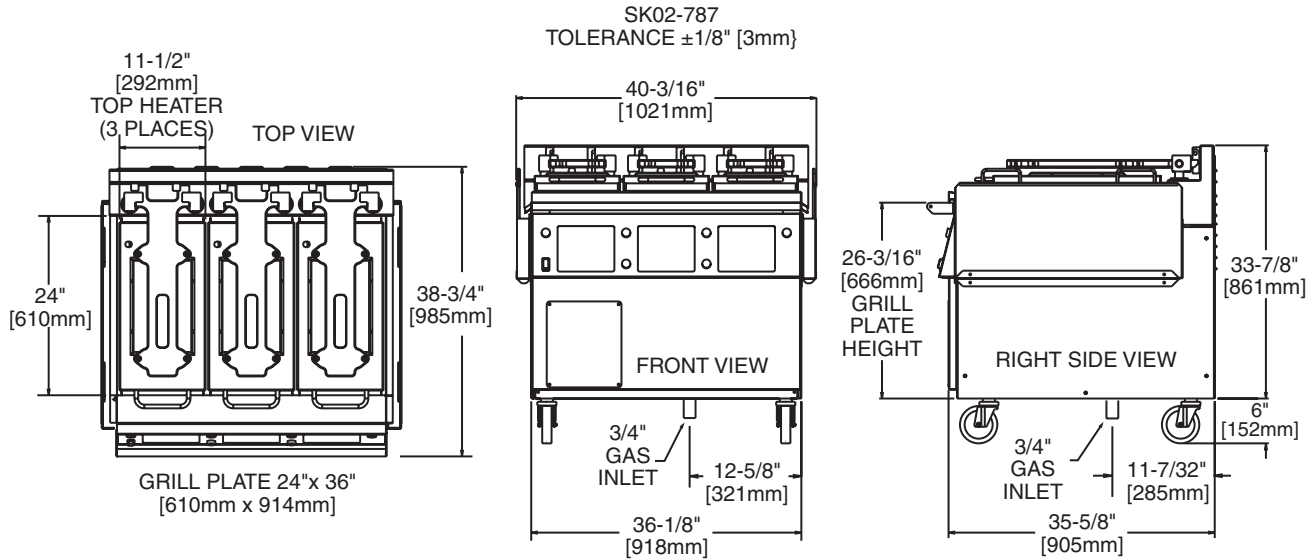

Model	Total kW Load	Loading kW Per Phase			Nominal Amps Per Line								
		208/220/240V 3ph			208V 3-Phase Delta			220V 3-Phase Delta			240V 3-Phase Delta		
		X-Y	X-Z	Y-Z	X	Y	Z	X	Y	Z	X	Y	Z
XG36	12.99	4.00	4.99	4.00	37.43	33.30	37.43	35.38	31.49	35.38	32.43	28.90	32.43
XG36-2 L/R	8.66	2.66	3.33	2.66	24.93	22.14	24.93	23.57	20.94	23.57	21.61	19.19	21.61
XG36-1 L/C/R	4.33	1.33	1.66	1.33	12.46	11.07	12.46	11.78	10.47	11.78	10.80	9.59	10.80
XG36-F	1.00	-	1.00	-	4.16	-	4.16	3.90	-	3.90	3.60	-	3.60

Model	Total kW Load	Loading kW Per Phase				Nominal Amps Per Line											
		380/400/415V				380V			400V			415V					
		L1/N	L1/L2	L1/L3	L2/L3	L1/N	L1	L2	L3	L1/N	L1	L2	L3	L1/N	L1	L2	L3
XG36CE	12.99	0.99	4.00	4.00	4.00	4.50	20.48	18.23	18.23	4.30	19.80	17.32	17.32	4.12	18.75	16.70	16.70
XG36CE-2 L/R	8.81	0.81	2.67	2.67	2.67	4.00	14.01	12.16	12.16	3.52	13.57	11.55	11.55	3.37	12.83	11.14	11.14
XG36CE-1 L/C/R	4.63	0.63	1.33	1.33	1.33	2.8	7.42	6.06	6.06	2.70	7.12	5.75	5.75	4.12	18.75	16.70	16.70
XG36CE-F	0.45	0.45	0.00	0.00	0.00	2.04	1.18	0.00	0.00	1.95	1.13	0.00	0.00	1.87	1.08	0.00	0.00

Clearances				Gas Pressure				Total Input	
Entry		Installation		Supply (min.)		Operating			
Crated	Uncrated	Sides	Rear	NAT	PRO	NAT	PRO	BTU/Hr	kW
47-1/2" (1207mm)	40-3/4" (1035mm)	6" (152mm)	3" (76mm)	7.0" WC	11.0" WC	3.2" WC	10.0" WC	99,000	29.1